

Over View

WLINK WL-R520 series Router is the internet of thing mobile broadband router and a machine to machine (M2M) industrial cellular router, which can optional works on LTE 4G or 3G cellular network to provide reliable, secure and high speed wireless connectivity with VPN supported. It is powerful and programmable industrial mobile router with high performance and harden casing design for remote management, telemetry, condition monitoring, CCTV, ATMs, vending machine and other M2M applications.

R520 4G router is an ideal wireless data transfer device for applications transferring large data load because of ultimately fast transfer speed in LTE network reaching up to 100M download and up to 50M upload. VPN features also can be configured in WLINK router, allowing you to utilize virtual private network service through a 4G/3G wireless router and built for stresses and workload of a modern industrial or commercial environment.

With dual SIM optional, WL-R520 series router could backup network between the two SIM cards to ensure continuous connection. The router also option with GPS capability, enable it ideal for fleet tracking or access management.



Benefit For Cellular Router

Avoid fixed-line trouble

Cost-effective, 30% saving

Rapid Deployment

Flexible placement

Security and Reliability

Return on Invest

Basic Features


- ◎ Industrial robust design and compact metal housing
- ◎ High data speed via LTE 4G or 3G network, 2.5G backward compatible
- ◎ Strong electromagnetic interference Resistance, Heat endure and radiation ability
- ◎ HUltra security, VPN: IPsec, PPTP, L2TP, GRE
- ◎ Built-in watch dog, Multi-link detection
- ◎ 802.11b/g/n Wi-Fi support, 150Mbps data rate
- ◎ 5xLAN or 4xLAN, 1xWAN
- ◎ MIMO antenna for 4G
- ◎ WAN port support PPPoE, static IP, DHCP client.
- ◎ Failover or Backup between WAN and Cellular
- ◎ Always online, reboot automatically if disconnected to ensure continual connection

- ◎ Support APN and VPDN wireless private network access in
- ◎ LCP/ICMP/flow/heartbeat check, ensure network usability
- ◎ Web/CLI/SSH/Management platform support, easy configure
- ◎ SNMP network management, NTP support
- ◎ Local & remote management (configuration, status, upgrade firmware)
- ◎ Supports DHCP Server
- ◎ Supports DNS proxy and Dynamic DNS (DDNS)
- ◎ Supports timing operation
- ◎ Supports LED status indication
- ◎ Shock and vibration resistant

Optional Features

- ◎ Optional Network Type includes LTE 4G, DC-HSPA+/HSPA+/HSPA/UMTS/WCDMA 3G and EVDO 3G
- ◎ GPS capability optional for fleet management or other tracking application
- ◎ DTU serial communication function optional
- ◎ Dual SIM optional for faiover/backup between two different network
- ◎ Dual SIM Dual Modem optional for fast switch between two different network.
- ◎ OpenVPN Optional
- ◎ OpenWRT Optional
- ◎ PPTP Sever optional
- ◎ Schedule reboot optional
- ◎ Customized acceptable

Typical Diagram and Application

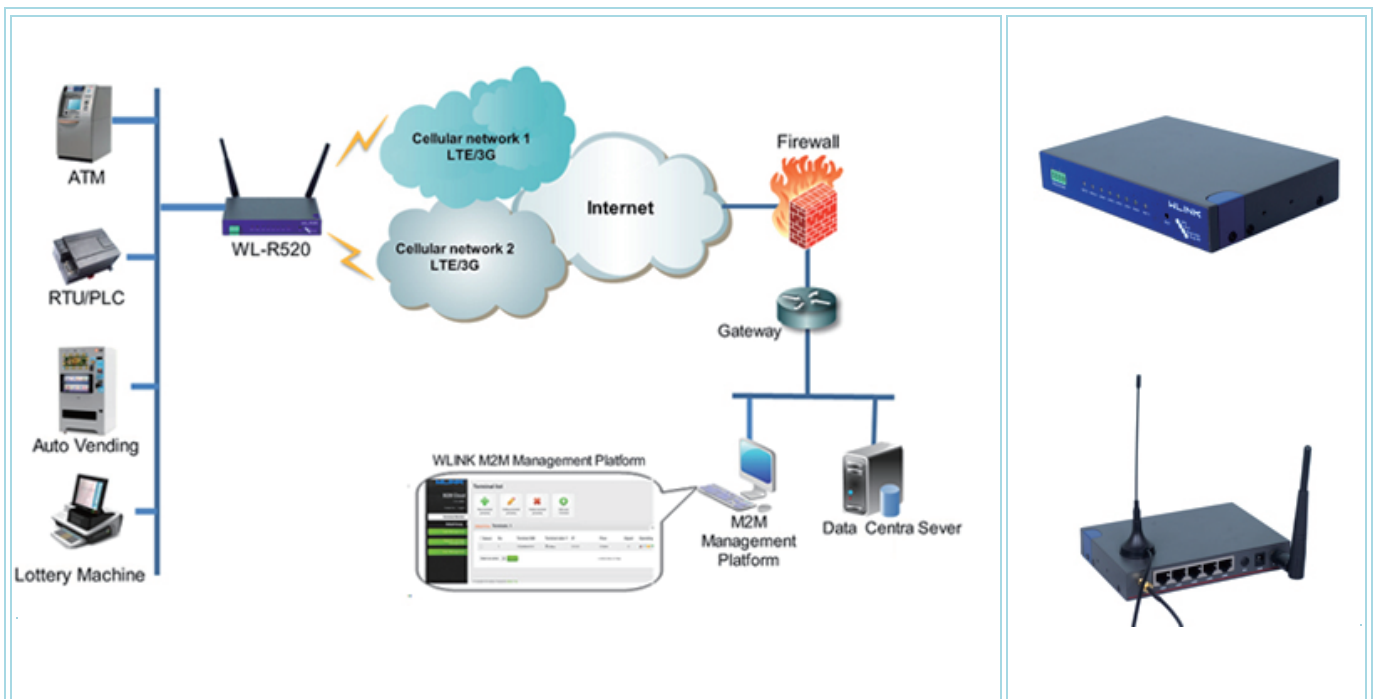

Energy	Digital Oil Field, Coal Mine, Solar, Smart Grid,
Utilities	Smart City, Traffic, Street Lighting, Public Safty, 4G Public hotspot, Environment monitoring, Video Surveillance
Industrial	Remote Telemetry, Tanking Monitoring, Automation, Remote PLC, Remote AMR, Remote Monitoring and control
Retail	ATM, POS(Point-of-Sale), Vending Machine, Lottery Machine, Branch network, Digital Signage, Video Surveillance, failover between WAN&4G/3G
Transpotation	Bus WiFi, WiFi on Board, Vehicle video surveillance, Fleet tracking and management, Bus Advertising

Specification

Optional Supports Mobile Network	<ul style="list-style-type: none"> ◎ FDD LTE / TDD LTE ◎ DC-HSPA+/HSPA+/HSPA/WCDMA/UMTS ◎ EDGE/GPRS ◎ CDMA2000 EVDO/CDMA 1X 	Ethernet Standard	<ul style="list-style-type: none"> ◎ IEEE 802.3 ◎ IEEE 802.3u 	
Interface	<ul style="list-style-type: none"> ◎ 5×10/100Mb LAN (4XLAN, 1xWAN) ◎ 1× RS-232 console port(RJ45) ◎ 3× SMA-K antenna interface ◎ 1× Standard SIM/R-UIM interface (2x SIM optional) ◎ 1× Standard DC power interface 	LED instruction	<ul style="list-style-type: none"> ◎ Net ◎ WLAN ◎ WAN ◎ LAN (LAN1~LAN4) 	
Route protocol	<ul style="list-style-type: none"> ◎ Static route ◎ RIPv2/OSPF dynamic route 	Power supply	<ul style="list-style-type: none"> ◎ 5 - 32VDC 	
Device management	<ul style="list-style-type: none"> ◎ Local or remote web browser (IE v8 or above) ◎ CLI/Telnet command ◎ M2M management platform (optional) ◎ SSH configure (optional) 	WiFi	<ul style="list-style-type: none"> ◎ Standard: IEEE 802.11b/g/n ◎ WEP, WPA and WPA2 encryption ◎ Standard 150Mbps, 300Mbps optional ◎ AP, Client, station, bridge mode support 	
Firewall & Filter	<ul style="list-style-type: none"> ◎ IP packet/Domain/MAC filter ◎ NAT ◎ DMZ 	VPN	<ul style="list-style-type: none"> ◎ IPSec ◎ PPTP/L2TP client ◎ GRE/IPIP 	
Power Consumption	<ul style="list-style-type: none"> ◎ Idle: 80mA@+12VDC ◎ Single Module Communications: 320mA@+12VDC ◎ Dual Module Communications: 600mA@+12VDC 	Other	<ul style="list-style-type: none"> ◎ Dimension: 176mm x 105mm x 25mm (not including antenna) ◎ Weight: 510g ◎ Operation temperature: -30~+70 °C ◎ Store temperature: -40~+85 °C ◎ Related humidity: <95% (non-condensing) ◎ Guarantee: one year 	
Standard	<ul style="list-style-type: none"> EN 300 328 v 1.7.1 (2006-10) EN 301 489-1 EN 301 908-1 EN 55022:2010/AC:2011 EN 55024:2010 EN 61000-3-3:2008 	<ul style="list-style-type: none"> EN 301 489-17 EN 301 511 EN 301 908-13, EN 60950-1, EN 61000-3-2 EN 62311:2008 	Approval	<ul style="list-style-type: none"> CE RoHS CCC

Partial Order Number List

Model	LTE	3G	Interface	Dual SIM	WiFi	GPS	DL	UL
WL-R520L	FDD LTE 2600/2100/1800/900/800MHz	HSPA+ 800/850/900/1900/2100MHz	4xLAN 1xWAN		✓		100M	50M
WL-R520L-d	FDD LTE 2600/2100/1800/900/800MHz	HSPA+ 800/850/900/1900/2100MHz	4xLAN 1xWAN	✓	✓		100M	50M
WL-R520L-g	FDD LTE 2600/2100/1800/900/800MHz	HSPA+ 800/850/900/1900/2100MHz	4xLAN 1xWAN		✓	✓	100M	50M
WL-R520LH1	FDD LTE 800/850/900/1800 /1900/2100/2600MHz	DC-HSPA+/HSPA+ 2100/1900/850/900MHz	4xLAN 1xWAN		✓		100M	50M
WL-R520LH1-d	FDD LTE 800/850/900/1800 /1900/2100/2600MHz	DC-HSPA+/HSPA+ 2100/1900/850/900MHz	4xLAN 1xWAN	✓	✓		100M	50M
WL-R520LH1-g	FDD LTE 800/850/900/1800 /1900/2100/2600MHz	DC-HSPA+/HSPA+ 2100/1900/850/900MHz	4xLAN 1xWAN		✓	✓	100M	50M
WL-R520LF	FDD LTE 1800/2100/2600MHz TDD LTE 1900/2300/2600MHz	HSPA+ 2100/1900/900/850MHz	4xLAN 1xWAN		✓		100M	50M
WL-R520LF-d	FDD LTE 1800/2100/2600MHz TDD LTE 1900/2300/2600MHz	HSPA+ 2100/1900/900/850MHz	4xLAN 1xWAN	✓	✓		100M	50M
WL-R520LF-g	FDD LTE 1800/2100/2600MHz TDD LTE 1900/2300/2600MHz	HSPA+ 2100/1900/900/850MHz	4xLAN 1xWAN		✓	✓	100M	50M
WL-R520H1		HSPA+ 2100/1900/900/850MHz	4xLAN 1xWAN		✓		21M	5.76M
WL-R520H1-d		HSPA+ 2100/1900/900/850MHz	4xLAN 1xWAN	✓	✓		21M	5.76M
WL-R520H1-g		HSPA+ 2100/1900/900/850MHz	4xLAN 1xWAN		✓	✓	21M	5.76M
WL-R520H2		HSPA 2100/1900/900/850MHz	4xLAN 1xWAN		✓		14M	5.76M
WL-R520H2-d		HSPA 2100/1900/900/850MHz	4xLAN 1xWAN	✓	✓		14M	5.76M
WL-R520H2-g		HSPA 2100/1900/900/850MHz	4xLAN 1xWAN		✓	✓	14M	5.76M
WL-R520H4		HSPA+ 900/2100 or 850/1900MHz	4xLAN 1xWAN		✓		21M	5.76M
WL-R520H4-d		HSPA+ 900/2100 or 850/1900MHz	4xLAN 1xWAN	✓	✓		21M	5.76M
WL-R520H4-g		HSPA+ 900/2100 or 850/1900MHz	4xLAN 1xWAN		✓	✓	21M	5.76M
WL-R520E		EVDO 800MHz	4xLAN 1xWAN		✓		3.1M	1.8M
WL-R520E-d		EVDO 800MHz	4xLAN 1xWAN	✓	✓		3.1M	1.8M
WL-R520E-g		EVDO 800MHz	4xLAN 1xWAN		✓	✓	3.1M	1.8M
WL-R520E-dm		EVDO 800MHz HSPA+ 2100/1900/850MHz	4xLAN 1xWAN	Dual SIM Dual Module	✓		3.1M	1.8M

Note:

1. If request other frequency band model, please consult wlink sale person
2. Please specify before order if need OpenWRT or OpenVPN
3. Please specify when order if request other optional features